


ESPERA

NEW!

Weighing & Labeling
Heavy Products

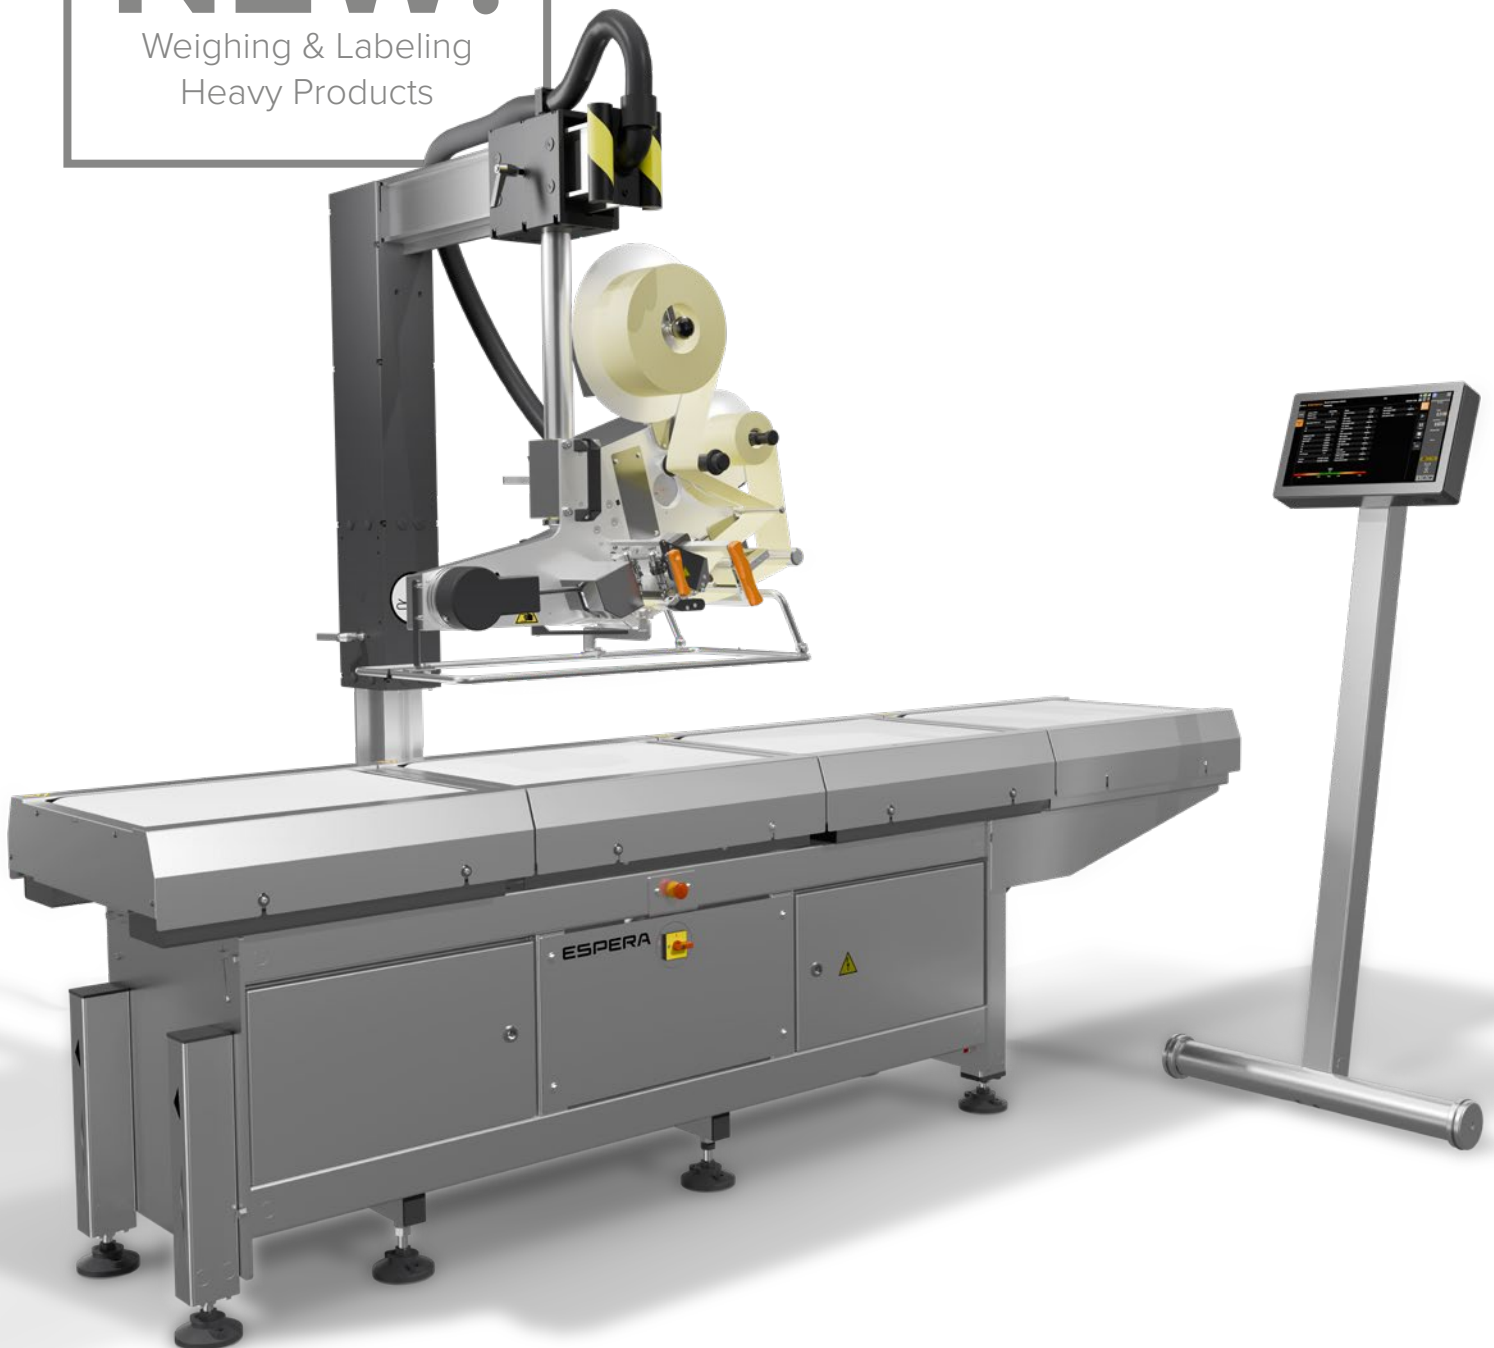


ESPERA NOVA ES-H

The industrial scale for heavy products – robust, powerful, easy to operate.

DESIGNED FOR RELIABLE PERFORMANCE WITH HEAVY PRODUCTS

Cardboard boxes, crates, industrial packaging units, large cuts of meat, or heavy blocks of cheese place special demands on weigh-price labeling. The ESPERA ES-H weigh-price labelers, designed for heavy products, were developed specifically for these demanding applications and impress with their exceptional stability, precision, durability and full stainless steel design.

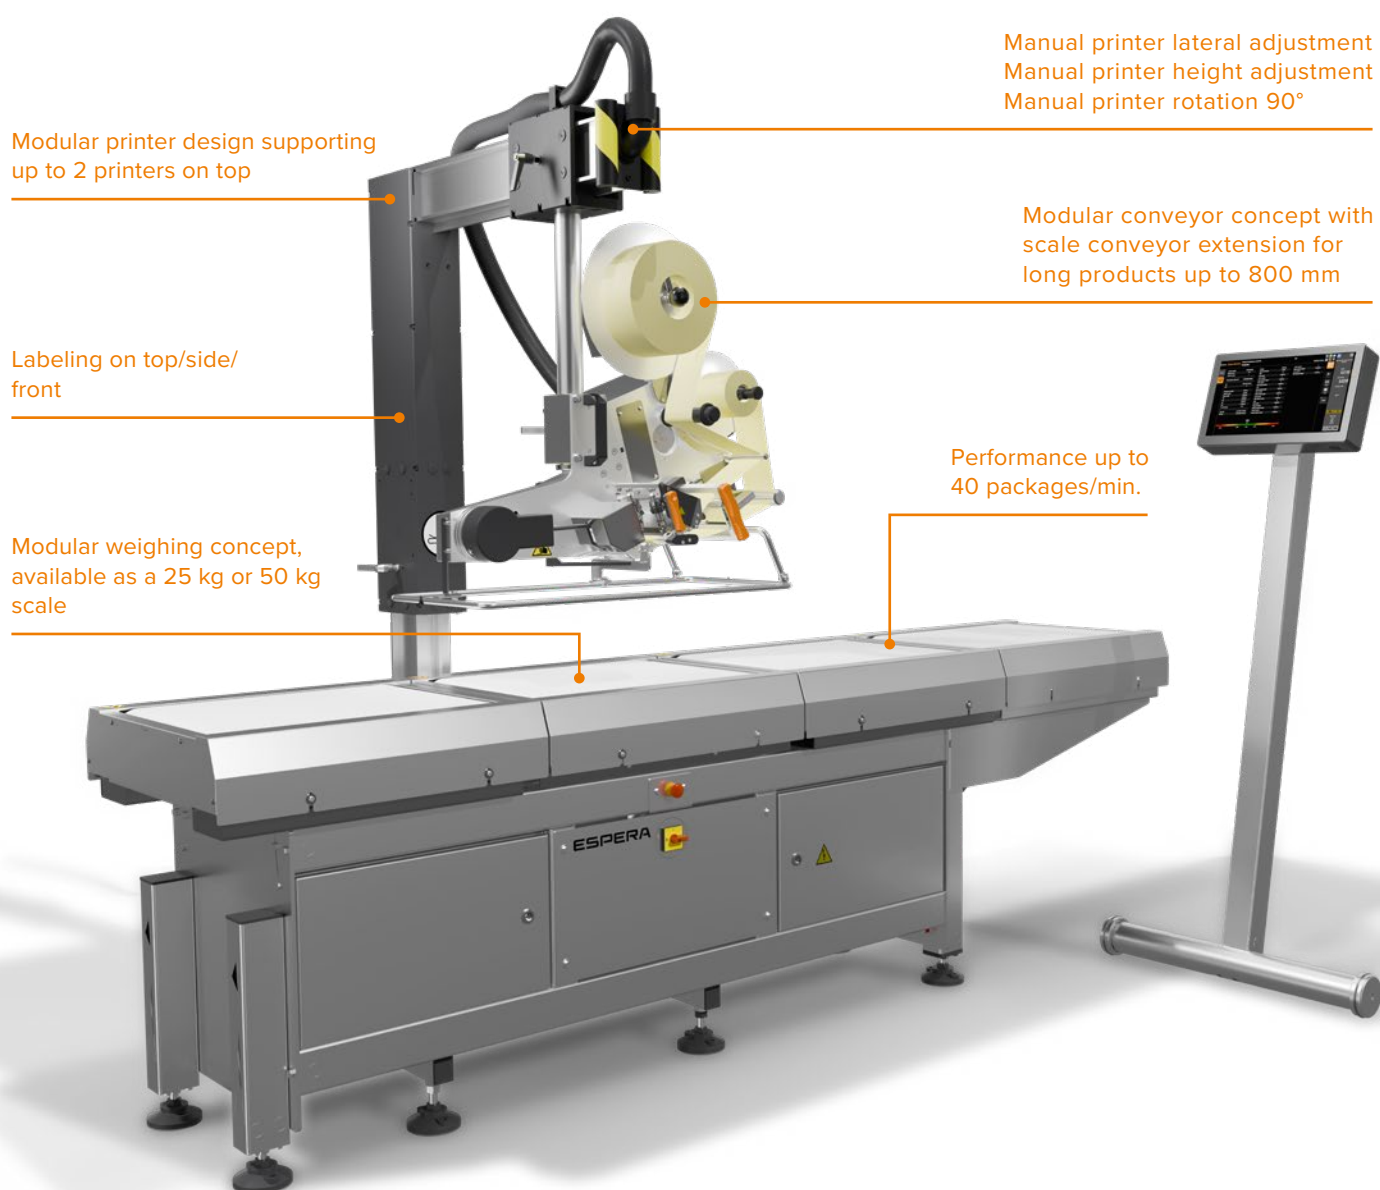

Even with heavy products, the system ensures smooth product transport, simplifies handling, and guarantees reliable weight measurement.

ADJUSTABLE APPLICATOR, MAXIMUM FLEXIBILITY

Depending on requirements, labeling can be performed from above, from the side, or from the front or back. This enables precise labeling of a wide variety of products and packaging using a single applicator system.




The applicator is adjusted manually.

Perfect labeling – even if the surface isn't.

The ES-H price labeler enables precise and reliable labeling even on uneven, curved or naturally shaped products, thus ensuring optimal product labeling in every application.


ES-H front view

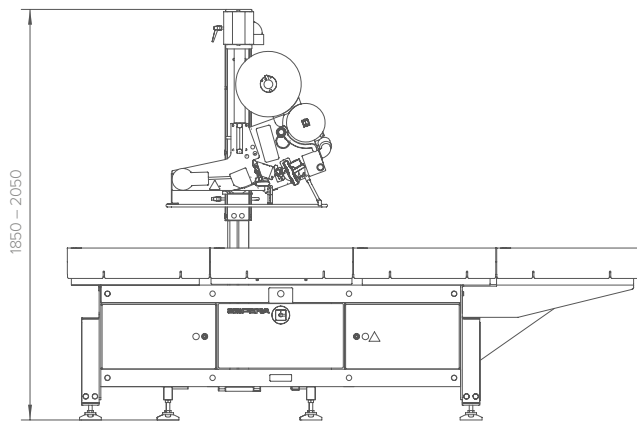


Technical Specifications

Terminal	15.6" full glass swipe screen Stand/mounted
Performance 25 kg scale 50 kg scale	40 packs/min. 35 packs/min.
Weighing module	15 kg, 25 kg / 5 g, 10 g; 25 kg, 50 kg / 10 g, 20 g
Printing speed	250 mm/sec.
Printing resolution	300 dpi
Printing technology	Thermal direct, thermal transfer
Label roll outer diameter	300 mm
Label roll core diameter	76 mm
Label minimum (L x W)	150 x 110 mm
Label maximum L x W)	37 x 37 mm
Package width max 25 kg scale	40 – 400 mm
Package width max 50 kg scale (Conveyor belts are positioned higher)	40 – 500 mm
Package length max without weighing belt extension	200 – 600 mm
Package length max with 50 mm weighing belt extension	300 – 700 mm
Package length max with 100 mm weighing belt extension	400 – 800 mm
Label winding	Inside
Package height max.	400 mm
Temperature range	0 °C – +40 °C
Humidity	20 % – 85 %
Protection level	IPX5
Power supply	110 V – 240 V, 50/60 Hz
Label application technology	Contact flap applicator

ES-H Terminal

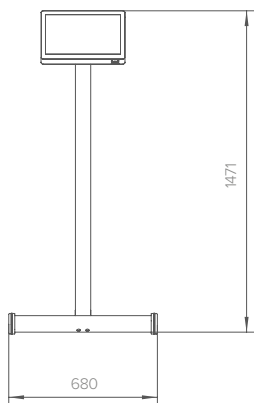

ES-H view from the side

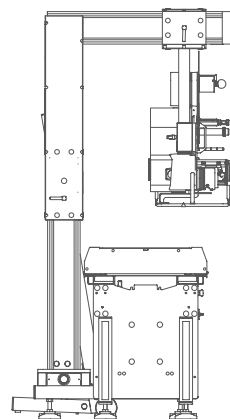

ONE STEP AHEAD.

ESPERA-WERKE GMBH

Moltkestraße 17 - 33
47058 Duisburg
Germany

Telephone: +49 203 30 54 - 0
Fax: +49 203 30 54 - 275
E-Mail: info@espera.com

www.espera.com